


High Frequency Off Grid Solar Inverter PV1800 VHM Series (2KW-5.5KW)

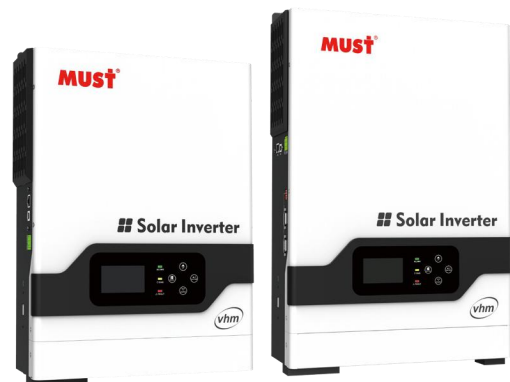


Features

- Rated power : 2KW -5.5KW
- Pure sine wave solar inverter
- Output power factor 1
- Built-in 80A MPPT solar charger
- Built-in anti-dust kit for harsh environment
- Support parallel operation up to 3 units (available for 3KW-5.5KW 48V)
- WIFI remote monitoring (optional)
- Compatible to generator


Introduction

PV1800 VHM is a multi-functional inverter/charger, combining functions of inverter, solar charger and battery charger to offer uninterruptible power support in portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and acceptable input voltage based on different applications.


Back panel printing description

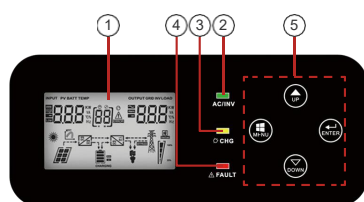

1. LCD Display
2. Status Indicator
3. Charging Indicator
4. Fault Indicator
5. Function Buttons

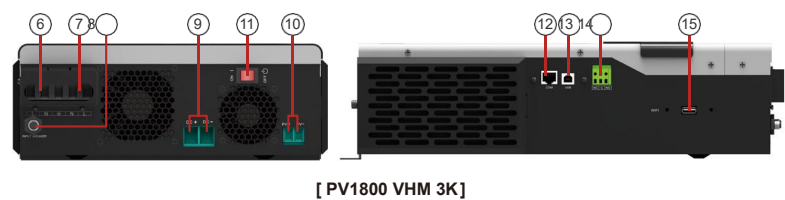


[PV1800 VHM 3K]

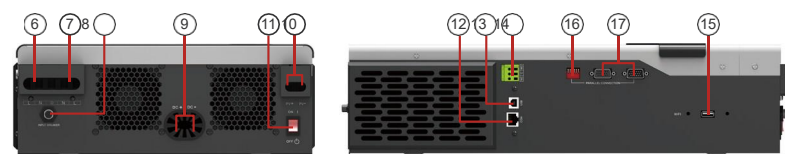

[PV1800 VHM 5K]

Solar system connection

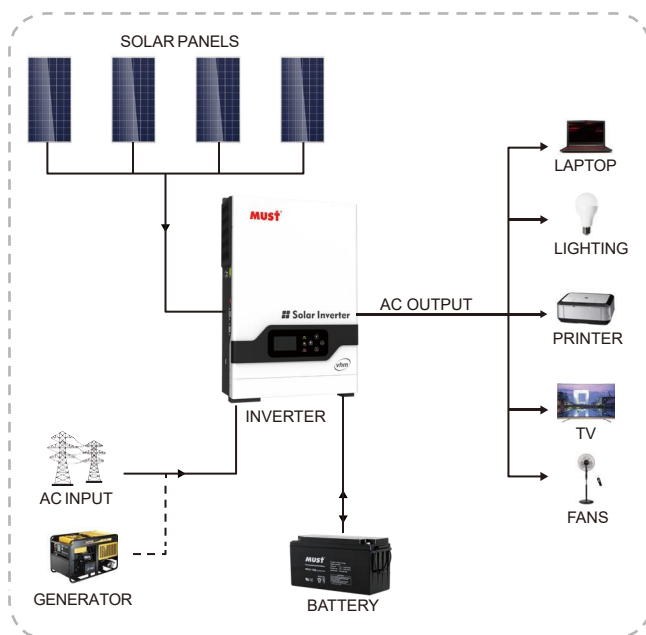

6. AC input
7. AC output
8. Circuit breaker
9. Battery input
10. PV input
11. Power on/off switch
12. RS-485 Communication port
13. USB
14. Dry contact
15. USB wifi
16. Parallel switch
17. Parallel communication port (only for parallel model)

Specification

MODEL		PV18-2024 VHM	PV18-3024 VHM	PV18-3048 VHM	PV18-4048 VHM	PV18-5048 VHM	PV18-5548 VHM
Nominal Battery System Voltage		24VDC			48VDC		
INVERTER OUTPUT	Rated Power	2000W	3000W	3000W	4000W	5000W	5500W
	Surge Power	4000W	6000W	6000W	8000W	10000W	11000W
	Waveform	Pure Sine Wave					
	AC Voltage Regulation (Batt.Mode)	(220VAC~240VAC)±5%					
	Inverter Efficiency(Peak)	93%					
	Transfer Time	10ms (UPS / VDE4105) 20ms (APL)					
AC INPUT	Voltage	230VAC					
	Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VDE4105)					
	Frequency Range	50Hz / 60Hz(Auto sensing)					
BATTERY	Normal Voltage	24VDC			48VDC		
	Floating Charge Voltage	27.4VDC			54.8VDC		
	Overcharge Protection	30VDC			60VDC		
SOLAR CHARGER & AC CHARGER	Maximum PV Array Open Circuit Voltage	145VDC					
	PV Array MPPT Voltage Range	30~130VDC			60~130VDC		
	Standby Power Consumption	2W					
	PV Input Power	2000W			4000W		
	Maximum Solar Charge Current	80A					
	Maximum Efficiency	98%					
	Maximum AC Charge Current	20A/30A			60A		
Maximum Charge Current	80A			140A			
MECHANICAL SPECIFICATIONS	Machine Dimensions(W*H*D)(mm)	272*355*100			297.5*468*125		
	Package Dimensions(W*H*D)(mm)	540*395*241			638*395*241		
	Net Weight(kg)	10	11	13.3			
	Gross Weight(kg)	11.7	12	16.4			
OTHER	Humidity	5% to 95% Relatiy Humidity (Non-condensing)					
	Operating Temperature	0°C~50°C					
	Storage Temperature	-15°C ~60°C					